


# ROBIN ParFect 150 FW

## Photometric Diagram

### Min. Zoom


Total Output: 1136 lumens

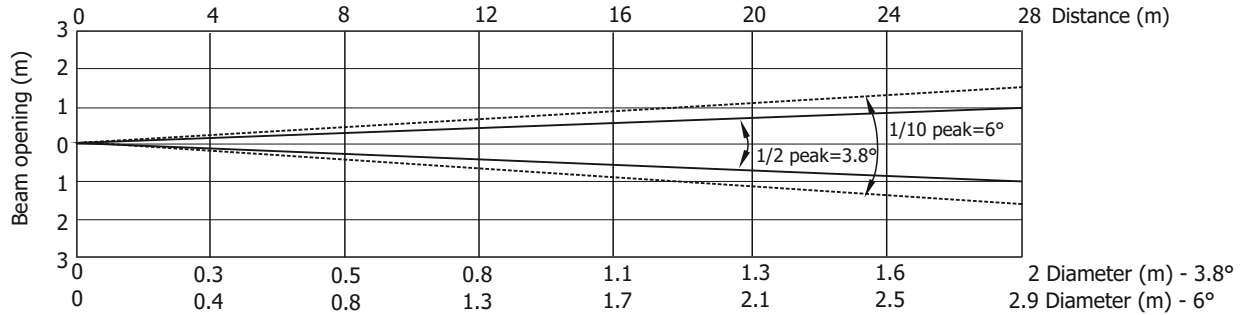

Distance (m)	4	5	8	12	16	20	24	28	
Red	2609/242	1670/155	652/61	290/27	163/15	104/10	73/7	53/5	Intensity (center) Lux/Footcandles
Green	6000/557	3840/357	1500/139	666/62	375/35	240/22	166/16	122/11	
Blue	875/82	560/52	219/20	97/9	55/5	35/3.3	24/2.3	18/1.7	
White	7234/672	4630/430	1809/168	803/75	452/42	289/27	201/19	147/14	
R+G+B+W	12797/1189	8190/761	3200/297	1422/132	800/74	511/48	355/33	261/24	

### Illuminance distribution

Distance=5m

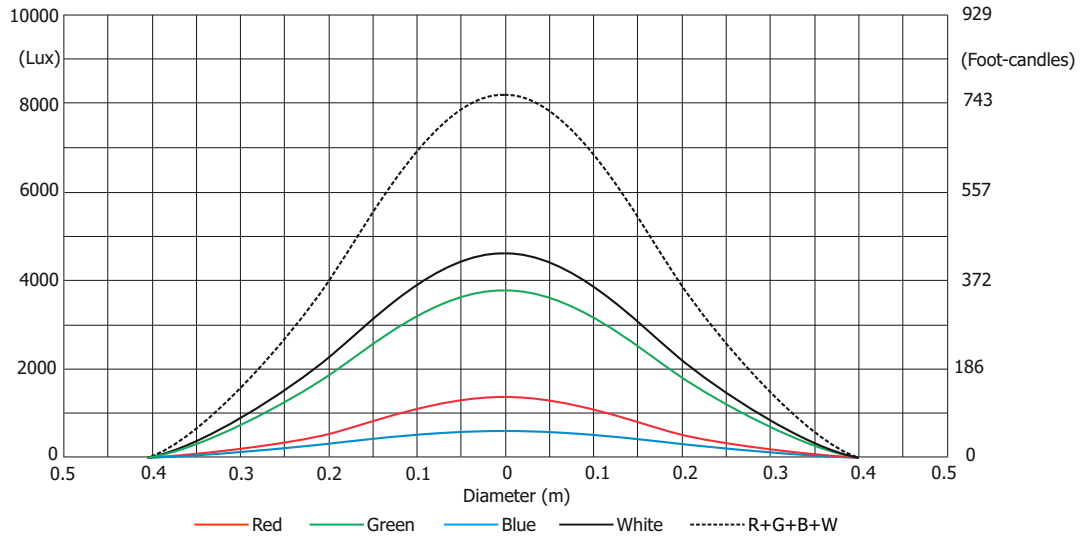

Fixture setting: White Point 8000K Off  
Fan mode: Auto


Copyright © 2017 Robe Lighting s.r.o. - All rights reserved  
All Specifications subject to change without notice

# ROBIN ParFect 150 FW

## Photometric Diagram

### Max. Zoom


Total Output: 2288 lumens

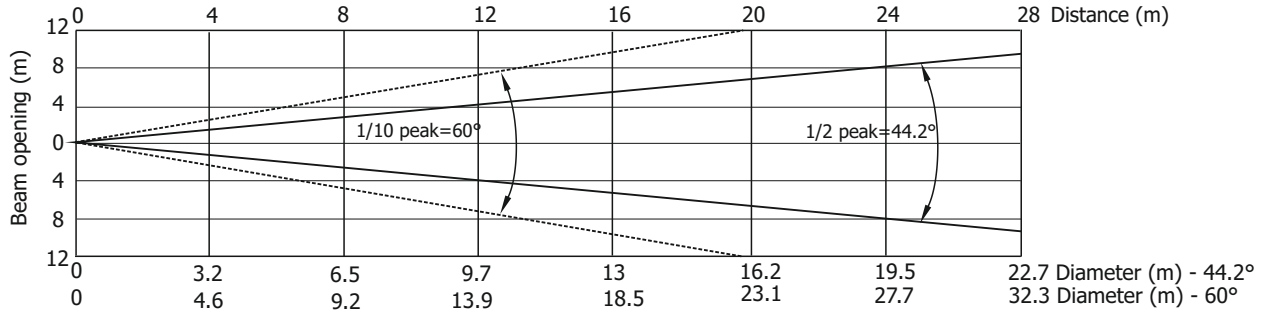

Distance (m)	4	5	8	12	16	20	24	28	Intensity (center) Lux/Footcandles
Red	73/6.8	47/4.4	18/1.7	8/0.8	5/0.4	3/0.3	2/0.2	1.5/0.1	
Green	148/14	95/9	37/3.4	17/1.5	9/1	6/0.6	4/0.4	3/0.3	
Blue	20/2	13/1.2	5/0.5	2.3/0.2	1.3/0.1	0.8/0.1	0.6/0.1	0.4/0.08	
White	181/17	116/11	45/4.2	20/1.9	11.3/1.1	7/0.7	5/0.5	4/0.3	
R+G+B+W	333/31	215/20	84/8	37/3.5	21/2	13/1.2	9/1	7/0.6	

### Illuminance distribution

Distance=5m

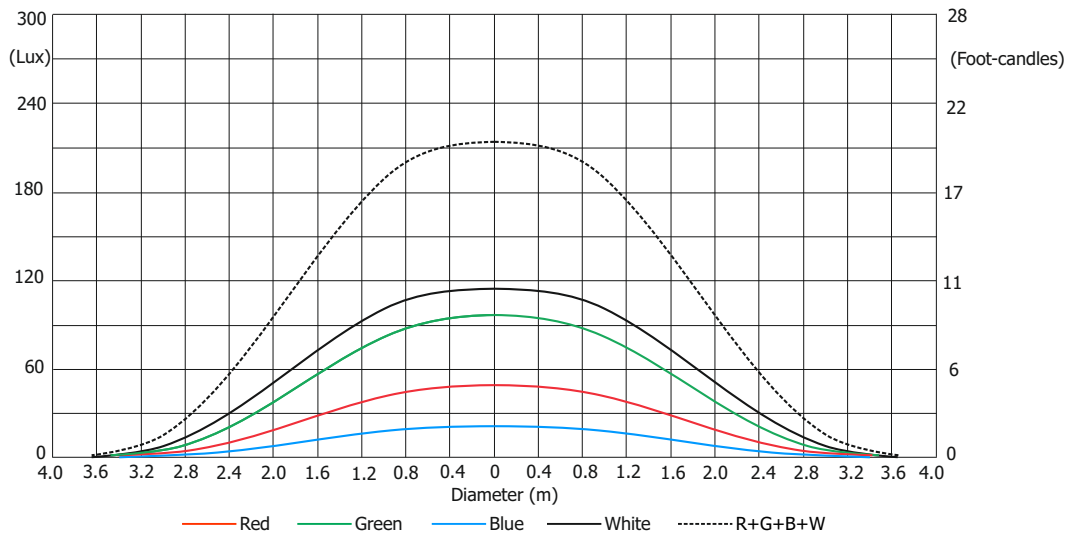

Fixture setting: White Point 8000K Off  
Fan mode: Auto

Copyright © 2017 Robe Lighting s.r.o. - All rights reserved  
All Specifications subject to change without notice